



QuickFacts

NFB-H Series Condensing Fire Tube Boilers

Ratings & Specifications

	Model	
	NFB-175H	NFB-200H
Product Approvals		
CSA	Yes	Yes
SCAQMD 1146.2 (NOx, <20 ppm)	Yes	Yes
ASME	Yes "H" stamp	Yes "H" stamp
AHRI Number	206368828	206368829
Energy Star	Yes	Yes
Space Heating Ratings		
AFUE, %	95.0	95.0
Heating Capacity, BTU/H	160,000	182,000

Input Ranges

Model	Range (BTU/H)	TDR
NFB-175H	13,300–175,000	13.2:1
NFB-200H	13,300–199,900	15:1

Warranty

Type	Residential*	Commercial
Heat exchanger	15 year limited warranty	10 years
Parts	5 years	3 years
Labor	1 year	1 year

*Applies to single family residential locations.
For complete details please refer to the full warranty at Navieninc.com.

Product Features

**PATENTED
STAINLESS STEEL
FIRE TUBE HX**

**ADVANCED
USER INTERFACE**

**TDR UP TO
15:1**

**3 ZONES
VALVES or PUMPS**


**NG^{OR} LP
FIELD GAS
CONVERTIBLE**

**2" VENT
UP TO
65 FEET & 3" VENT
UP TO
150 FEET**


**AFUE
95.0%**

**1/2" GAS
CAPABILITY
UP TO
24 FT**

NFB-H: The Inside Story

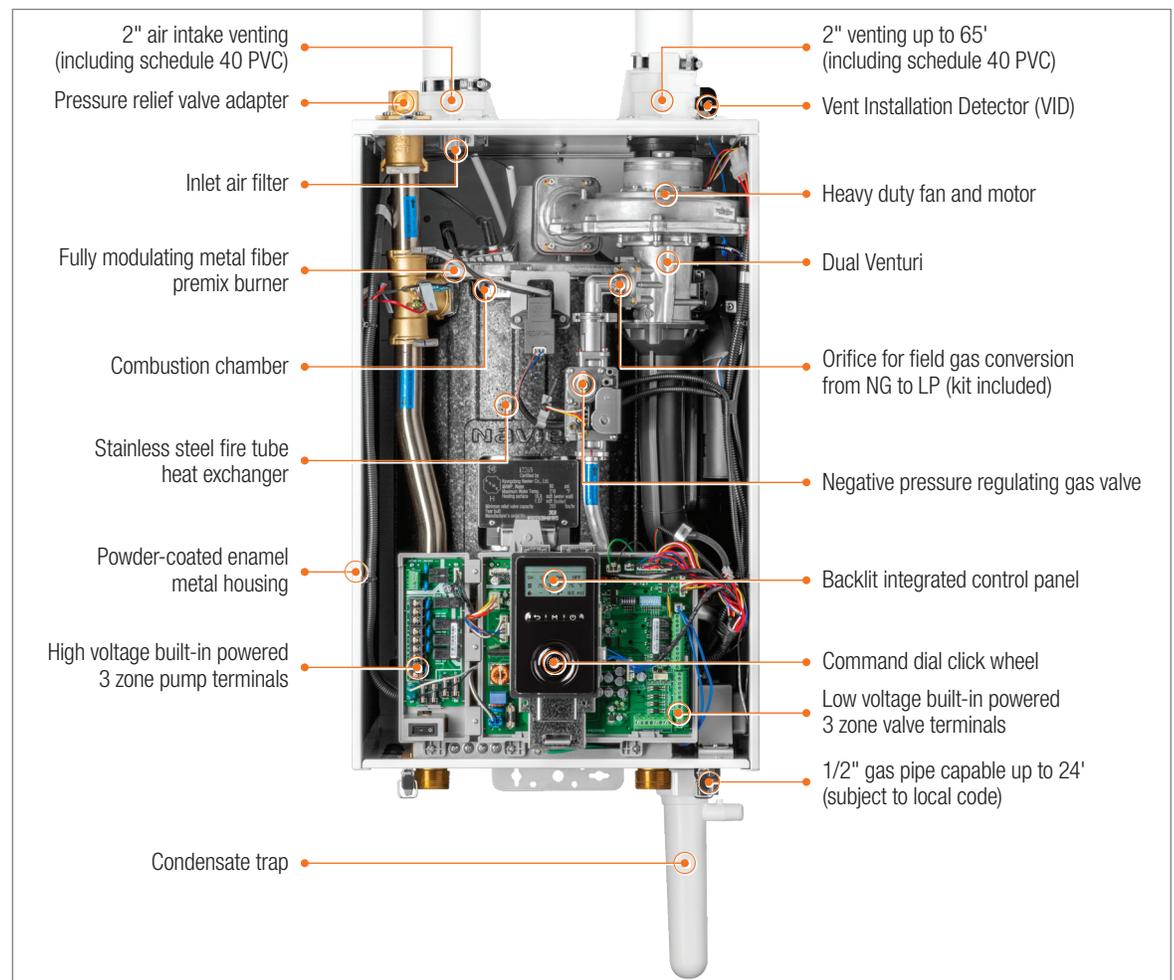

Dimensions

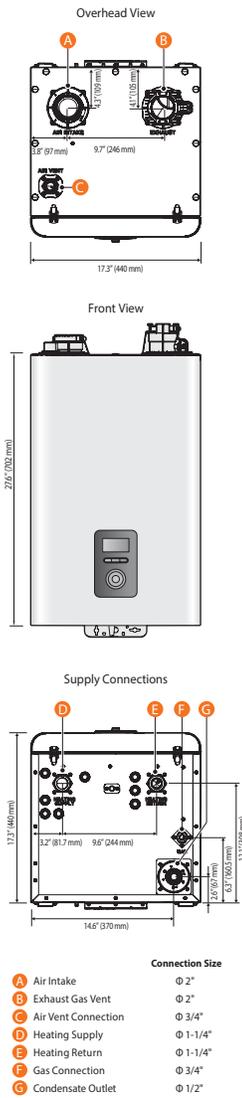

Ratings & Specifications

Model Number ¹	Navien Condensing Boiler Space Heating Ratings				Other Specifications			
	Heating Input, (BTU/H)		Heating Capacity ² (BTU/H)	Net AHRI Rating Water ³ (BTU/H)	AFUE ² %	Water Pressure	Water Connection Size (Supply, Return)	Water Volume
	Min	Max						
NFB-175H	13,300	175,000	160,000	139,000	95.0	6-80 psi	1-1/4" NPT	4.5 gallons
NFB-200H	13,300	199,900	182,000	158,000	95.0			

¹ Ratings are the same for natural gas models converted to propane use.

² Based on U.S. Department of Energy (DOE) test procedures.

³ The net AHRI water ratings shown are based on a piping and pickup allowance of 1.15.

Consult Navien before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.


Item	Model	
	NFB-175H	NFB-200H
Dimensions	17.3" W x 17.3" D x 27.6" H	
Boiler weight	121 lb (55 kg)	
Boiler weight with water	148 lb (67 kg)	
Installation type	Indoor wall-hung	
Venting type	Forced draft direct vent	
Ignition	Electronic ignition	
Natural Gas supply pressure (from source)	3.5" to 10.5" WC	
Propane Gas supply pressure (from source)	8.0" to 13.0" WC	
Natural Gas manifold pressure	-0.03" to -0.70" WC	-0.03" to -0.85" WC
Propane Gas manifold pressure	-0.02" to -0.68" WC	-0.02" to -0.75" WC
Gas connection size	3/4" NPT	
Power supply	Main supply	120V AC, 60Hz
	Maximum power consumption	Less than 15 amperes
Materials	Casing	Cold-rolled carbon steel
	Heat exchanger	Stainless steel
Venting	Exhaust	2" or 3" PVC, CPVC, approved polypropylene 2" or 3" special gas vent type BH (Class III, A/B/C) 2" or 3" stainless steel
	Intake	2" or 3" PVC, CPVC, polypropylene 2" or 3" special gas vent type BH (Class III, A/B/C) 2" or 3" stainless steel
	Vent clearance	0" to combustibles
Safety devices	Flame rod, APS, ignition operation detector, water temperature high limit switch, exhaust temperature high limit sensor, water pressure sensor, vent installation detector (VID)	

Navien reserves the right to change specifications at any time without prior notice.

Please refer to Navieninc.com to verify you have the most current information.

Accessories

NaviLink® Wi-Fi Control PBCM-AS-001 NaviLink® Cable GXXX001659 NaviLink Lite Wi-Fi Control PBCM-AS-002	NFB-H Primary Manifold Kit (for single boiler) GFFM-MSOZUS-002	Ready-Link® Rack Base (V4) GFFM-KDIZUS-009 Add-on (V4) GFFM-KDIZUS-010	NaviClean™ Magnetic Filter for Boilers GXXX001727	Residential Neutralizer (V2) (1 unit) GXXX002212 Residential Replacement Media GXXX001323	Commercial Neutralizer (up to 6 units) GXXX002366 Commercial Replacement Media GXXX002368	Lg. Commercial Neutralizer (up to 16 units) GXXX002367 Lg. Commercial Replacement Media GXXX002369	Ready-Link® Communication Cable GXXX000546	SmartZone+™ Pump Controller 2 Zones PFMZ-02P-001 3 Zones PFMZ-03P-001 4 Zones PFMZ-04P-001 6 Zones PFMZ-06P-001	Universal Temperature Sensor GXXX001769	2" Common Vent Collar Kit 30014367B Includes cascade cable (GXXX000546), common vent collar damper and VID jumper cable.



Navien Inc., 20 Goodyear, Irvine, CA 92618 800-519-8794 Navieninc.com
 555 Hanlan Road. Unit7, Woodbridge, ON L4L 4R8 1-800-519-8794 navieninc.ca

